



Your project deserves it.



PHOENIX GX
WIWA PROFESSIONAL GX
HERKULES GX

WWW.WIWA.COM

WHY THE WIWA GX SERIES?

- Top performance even in the toughest areas of application
- Economical thanks to extremely sturdy design and long service life
- Precise results due to low pulsation
- Reliable even in continuous operation
- Low wear and low maintenance costs thanks to self-adjusting packings
- Ideal for automatic spraying systems and paint circulation systems



THE BENEFITS AT A GLANCE



- Durable full metal construction
- Air outlet for attaching additional pneumatic tools optional
- Pump housing seals before the threads avoid sticking due to coating seepage
- Piston and foot valves close quickly due to precision ball guides
- Near total air pocket removal due to minimal dead space
- Oil-free air motor does not require pneumatic oil for lubrication



Your project deserves it.



A photograph of a carpenter's workshop. In the foreground, a wooden workbench is cluttered with various tools, including a hand plane, a chisel, and a mallet. A person's arm, wearing a blue and green plaid shirt, is visible on the left side of the frame. In the background, a large window with a wooden frame allows bright light into the room. Several long, thin wooden planks are leaning against the wall and the window frame. The overall atmosphere is one of a busy, well-used craft space.

"With the WIWA PHOENIX GX, I stay flexible and mobile. Best results, wherever I am needed."

EFFICIENT • VERSATILE • HIGH QUALITY

PHOENIX GX Tripod



PHOENIX GX Feed hopper



PHOENIX GX Elevator



WIWA PHOENIX GX – the new high-performance, multi-purpose pumps for painting wood and metal as well as other coatings in industry and trade.

The WIWA PHOENIX GX Series consists of a versatile and high quality pump range for almost all areas of application. Thanks to its mobility and simple operation, it is ideal for large and small surface areas. Let us convince you of its durability and economical design.

MATERIALS

- Primers
- Sprayable spackle
- Sprayable paints and varnishes
- Plural-component and tar-epoxy paints (highly viscous and coarsely pigmented)
- Textured lacquers
- Hammered effect lacquers
- Zinc dust paints
- Anti-rust and micaceous iron oxide paints
- Low-solvent and solvent-free paints
- Stains
- Water-based varnishes
- Transparent lacquers
- Thick-film varnishes


AREAS OF APPLICATION


- Carpentries
- Furniture industry
- Paint shops
- Machinery and vehicle manufacture
- Steel and hall construction
- Steel processing industry
- Automatic and manual spray painting systems
- Marine coatings (interior coatings)
- Railcar manufacture
- Fluid transfer and paint supply systems

TECHNICAL DATA WIWA PHOENIX GX	Model 105030	Model 140053	Model 105018	Model 140032	Model 140020	Model 200042	Model 200065
Pump capacity per double stroke (cm ³)	43	43	72	72	111	111	72
Pressure ratio	30:1	53:1	18:1	32:1	20:1	42:1	65:1
Max. output at 60 double strokes (l/min/gpm)	2,6/0,7	2,6/0,7	4,3/1,1	4,3/1,1	6,7/1,8	6,7/1,8	4,3/1,1
Max. air inlet pressure (bar/psi)	8/116	8/116	8/116	8/116	8/116	8/116	7/101
Max. operating pressure (bar/psi)	240/3480	424/6149	144/2088	256/3712	160/2320	336/4873	455/6599
Model	Order No.	Order No.	Order No.	Order No.	Order No.	Order No.	Order No.
PHOENIX GX Elevator	0666589	0666591	0666590	0663944	0666592	0666559	0666593
PHOENIX GX Tripod	0667916	0667923	0667920	0667926	0667929	0667934	0667931
PHOENIX GX Wall bracket	0667919	0667925	0667922	0667927	0667930	0667935	0667933
PHOENIX GX Feed hopper	0667918	-	-	-	-	-	-

PERFORMANCE, JUST LIKE THE BIG ONES

- 1 Oil-free and low-icing, technically optimized high-performance air motor
- 2 Maintenance unit in a compact design directly on the air motor
- 3 Material pump and HP filter made of stainless steel
- 4 Easy to open high pressure filter with hook spanner
- 5 Coarse threads for easy assembly and disassembly of the material pump
- 6 Throat seal liquid sight glass; the level of throat seal liquid can be easily checked
- 7 QR code for quick access to the device's technical data

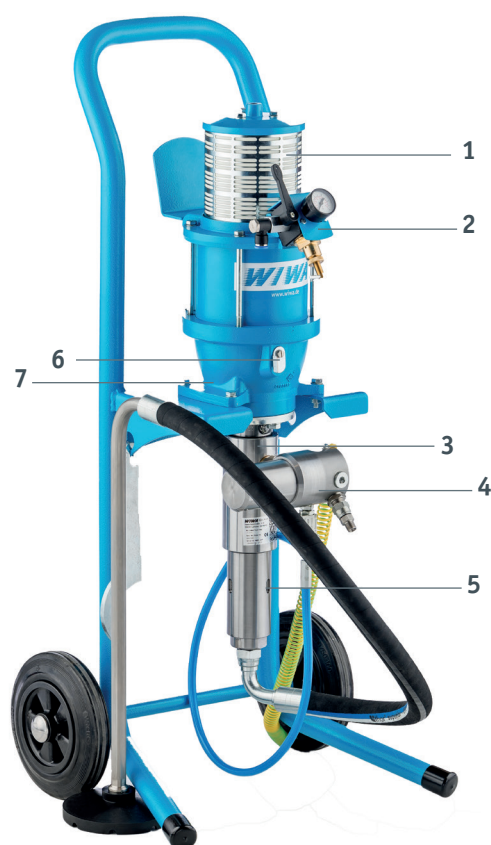

A white speedboat is shown from the side, moving across the water. The boat's hull is white with a dark stripe, and it has a stainless steel railing. The water is a golden-brown color, reflecting the low sun. The sky is a mix of blue and orange, with wispy clouds. The boat is leaving a white wake behind it.

Unconditional enthusiasm for the perfect finish. This is the WIWA PROFESSIONAL GX – a masterpiece in its class.

WIWA®

Your project deserves it.



QUALITY • STABILITY • ENTHUSIASM

PROFESSIONAL GX Cart



Experience noticeable quality, the best engineering skills and durability under the toughest conditions. The **WIWA GX** motor generation impresses with a full metal housing, optimized air distribution during service to minimize icing during continuous operation and reduced noise.

Low-maintenance, durable material pumps reduce operating costs and ensure uncompromising fluid flow. Unconditional enthusiasm perfected. This is the **WIWA PROFESSIONAL GX** – a masterpiece in its class.

MATERIALS

- Abrasive materials
- Flame protection
- Sprayable lacquers and paints
- Glassflake
- Insulation and thick-film material
- Anti-fouling materials
- Cold bitumen
- Short-fibre filling materials
- Low-solvent and solvent-free paints
- Plural component and tar-epoxy paints


AREAS OF APPLICATION

- Large areas
- Marine coatings
- Steel and hall construction
- Railcar manufacture
- Paint shops
- Offshore industry
- Industrial coatings
- Structural engineering and corrosion protection
- Insulation
- Fire protection
- Transfer pumps

TECHNICAL DATA WIWA PROFESSIONAL GX	Model 230063	Model 230051	Model 230035	Model 230027
Pump capacity per double stroke (cm ³)	153	189	275	360
Pressure ratio	63:1	51:1	35:1	27:1
Max. output at 60 double strokes (l/min/gpm)	9,2 /2,4	11,3/3	16,5/4,4	21,6/5,7
Max. air inlet pressure (bar/psi)	7/101	8/116	8/116	8/116
Max. operating pressure (bar/psi)	441/6396	408/5917	280/4061	216/3132
Model	Order No.	Order No.	Order No.	Order No.
PROFESSIONAL GX Cart	0664095	0664096	0664097	0664098
PROFESSIONAL GX Elevator	0664103	0664104	0664105	0664106
PROFESSIONAL GX Wall bracket	0664099	0664100	0664101	0664102

DESIGN FEATURES OF THE WIWA GX HIGH PRESSURE PUMPS

- 1 Muffler
- 2 Maintenance-free control
- 3 Air inlet
- 4 Generously sized air passages and exhaust bypass
- 5 Precision piston guiding
- 6 Nylon guide bushing
- 7 Throat seal liquid reservoir
- 8 Coupling
- 9 Material outlet
- 10 Spring-loaded packings
- 11 Hard-chromed double piston
- 12 Large valves with tungsten carbide valve seats and stainless steel valve balls
- 13 Material inlet

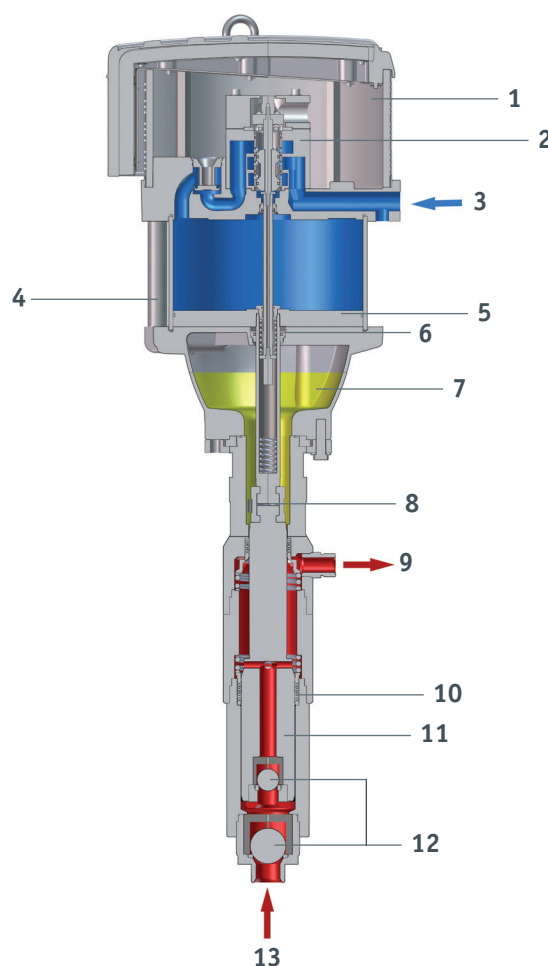



The art of engineering to perfection.
The WIWA HERKULES GX handles even
the largest projects with you.



EWIWA®

Your project deserves it.

POWERFUL • QUIET • GROUNDBREAKING

HERKULES GX Cart



HERKULES GX Wall bracket



HERKULES GX Elevator



The **WIWA HERKULES GX** Series is a powerful and dynamic addition to the WIWA airless product range in the upper performance classes. The **WIWA HERKULES GX** is particularly suitable for large surface areas and thick-layer coatings with very high pressure ratios and enormous delivery rates. Even the use of several spray guns at the same time and hose lengths of over 100 meters in length pose no problems for these airless paint sprayers.

MATERIALS

- Glassflake-epoxy
- Low-solvent and solvent-free paints
- Two-component materials
- Anti-fouling materials
- Fibrous materials
- Abrasive materials (zinc silicate e.g.)
- Cold bitumen
- Thick-film materials
- Flame protection


AREAS OF APPLICATION

- Marine and offshore industry
- Steel construction
- Coating and paint shops
- Construction insulation and waterproofing
- Rail
- Industry

TECHNICAL DATA WIWA HERKULES GX	Model 270088	Model 270071	Model 270049	Model 33375	Model 270037	Model 33357	Model 270024	Model 33337
Pump capacity per double stroke (cm ³)	153	189	275	275	360	360	270049	550
Pressure ratio	88:1	71:1	49:1	75:1	37:1	57:1	24:1	37:1
Max. output at 60 double strokes (l/min/gpm)	9,2/2,4	11,3/3	16,5/4,4	16,5/4,4	21,6/5,7	21,6/5,7	33,0/8,7	33,0/8,7
Max. air inlet pressure (bar/psi)	5,5/79	7/101	8/116	6,5/94	8/116	7/101	8/116	8/116
Max. operating pressure (bar/psi)	484/7019	497/7208	392/5685	487/7063	296/4293	399/5787	192/2784	296/4293
Model	Order No.	Order No.	Order No.	Order No.	Order No.	Order No.	Order No.	Order No.
HERKULES GX Cart	0662617	0662618	0662619	0663681	0662620	0663682	0662621	0663683
HERKULES GX Elevator	0660706	0660707	0660708	0663686	0660709	0663470	0660710	0663687
HERKULES GX Wall bracket	0660593	0660594	0660595	0663684	0660596	0663471	0660597	0663685
HERKULES GX Cart with 25 ltr./6,5 gal. feed hopper	-	0663817	-	-	-	-	-	-

FEATURES OF THE GX WORLD

- 1 Oil-free and low-icing, technically optimized high-performance air motor
- 2 Maintenance unit in a compact design directly on the air motor
- 3 Material pump and HP filter made of stainless steel
- 4 Easy to open high pressure filter with hook spanner
- 5 Coarse threads for easy assembly and disassembly of the material pump
- 6 Deep-tread tires also suitable for difficult terrain
- 7 Release agent sight glass; the level of release agent can be easily checked
- 8 QR code for quick access to the device's technical data
- 9 Stable multifunctional frame with holder for suction systems, tools, hoses and manual
- 10 Crane hooks for lifting the system

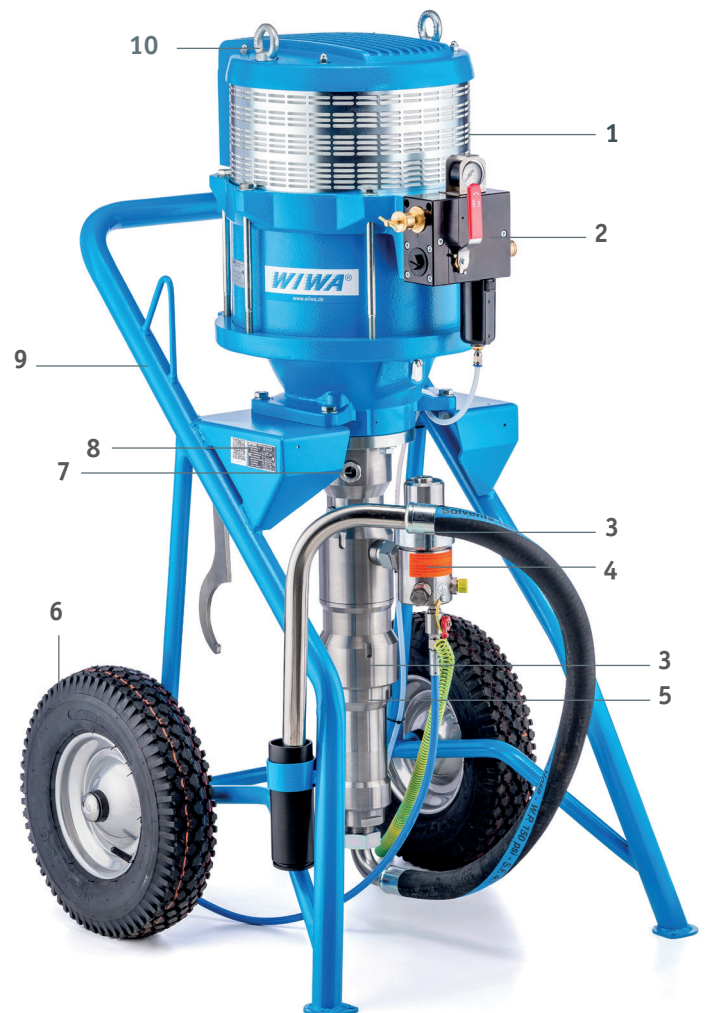

PRODUCT RANGE

ISO 9001
BUREAU VERITAS
Certification



ATEX 94/9/EG

Head Office and Production Germany

WIWA Wilhelm Wagner GmbH & Co. KG
Gewerbestrasse 1-3
35633 Lahnau, Germany
Visitor address: Georg-Ohm-Straße 12
35633 Lahnau, Germany
Phone: +49 (0) 6441 609-0

www.wiwa.de

WIWA Subsidiary USA

WIWA LLC – USA, Canada, Latin America
107 N. Main St.
P.O. Box 398, Alger, OH 45812
Tel.: +1-419-757-0141
Fax: +1-419-549-5173
Toll-Free: +1-855-757-0141

www.wiwausa.com



WIWA FLEXIMIX 2, electronic plural component spray equipment



WIWA DUOMIX, pneumatic plural component spray equipment



WIWA DUOMIX PU HX, hydraulic plural component spray equipment



WIWA DUOMIX 333 PFP ATEX, for intumescent fire protection material



WIWA HERKULES GX 333 GX, single feed (airless) spray equipment



WIWA VULKAN, pneumatic extrusion equipment